

NOTES: nts

① "SUBSTRATE":  
TYPICAL NORMAL WEIGHT  
CONCRETE

② SUBSTRATE W/ UNIVERSAL  
"BLUE PRIMER" (83237)


③ PMMA "H" RESIN (83240)  
MIN. 45 WET MILS.

④ REINFORCEMENT FLEECE  
(83236) ENCAPSULATED  
BETWEEN 2 WET LAYERS  
OF PMMA RESIN. @ 45  
WET MILS.

\* NORMAL WEIGHT CONCRETE  
IS PREFERRED. THE USE OF  
LIGHTWEIGHT STRUCTURAL  
CONCRETE REQUIRES USE  
OF MVS A/B (A38003 + A38101)

\*\* OVERBURDEN BY OTHERS.  
NOT SHOWN FOR CLARITY

\* 1/4" PMMA RESIN TO EXTEND  
BEYOND REINFORCEMENT  
BY MIN. 1/4"

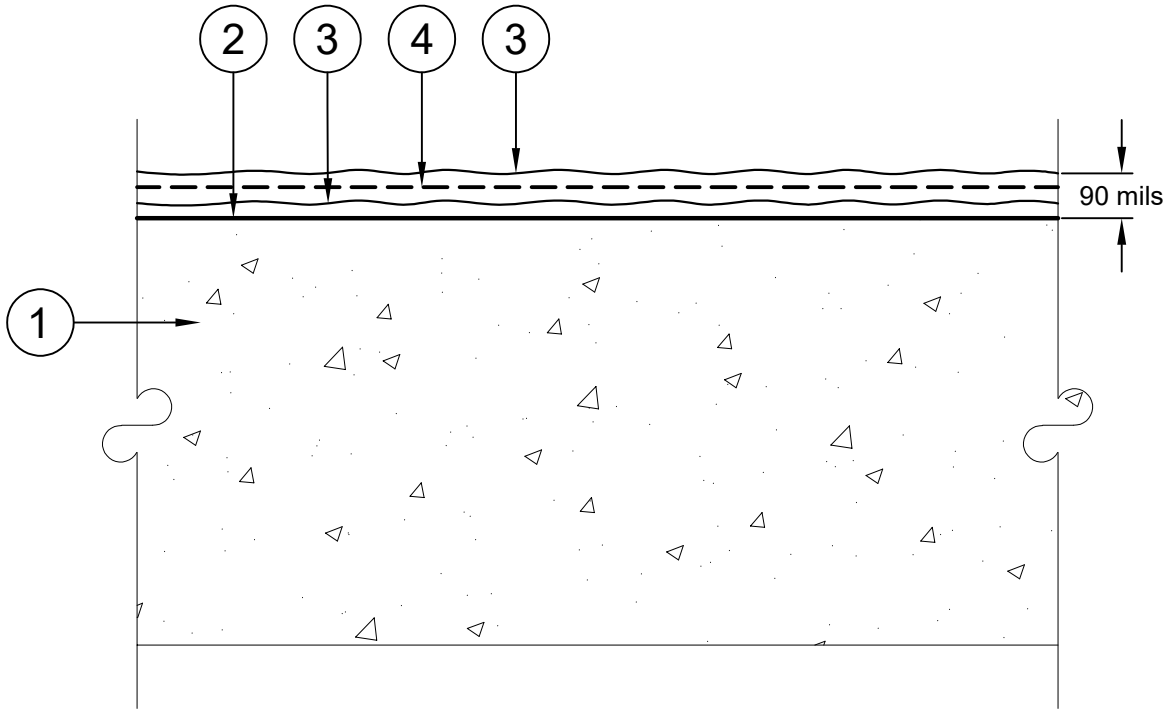

LAURENCIO WATERPROOFING™ ©

A DIVISION OF FBC CHEMICAL CORPORATION

# PMMA-001 TYPICAL REINFORCED MEMBRANE - HORIZONTAL